



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|----------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 2/4/2022 | THOUGHTON |
| | | | |
| | | | |

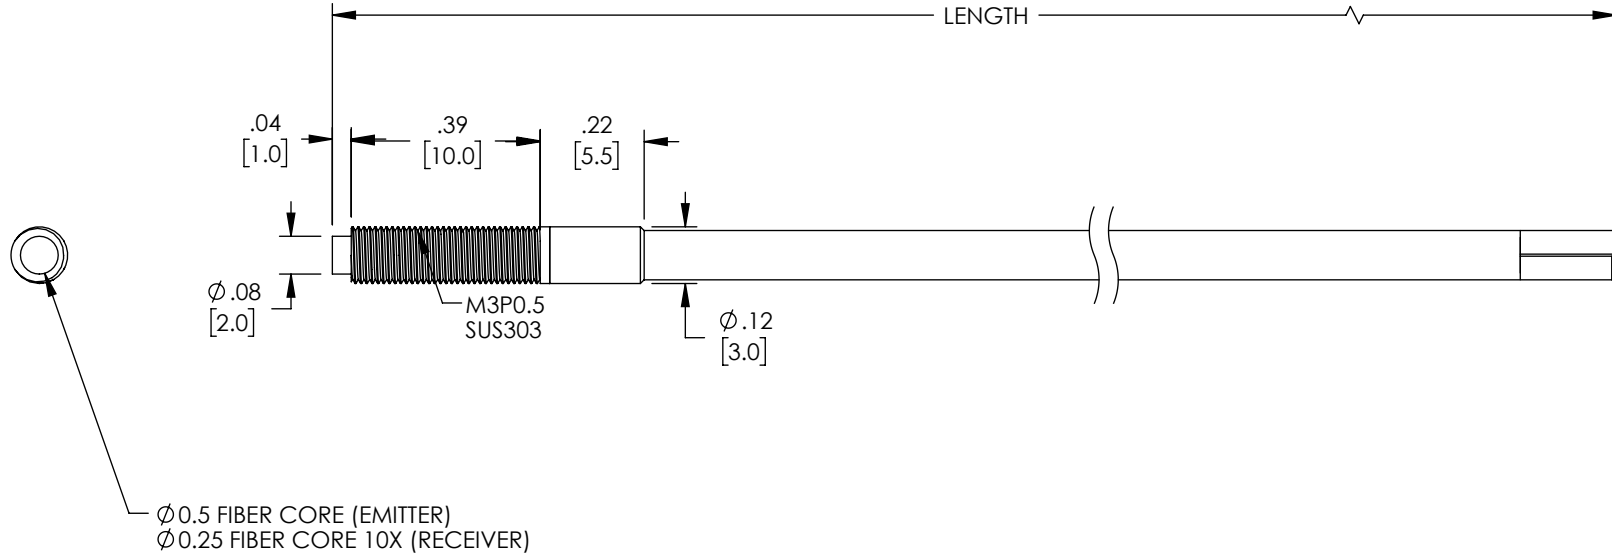

NOTES:
1. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

| | | | | | | | | | | |
|---|--|-------------------------------|--|------------------|--|--|--|---|--|------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] | | APPROVALS | | DATE | | <div>L-com[™] an INFINITI[®] brand</div> | | 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 | | |
| OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 | | DRAWN BY DMAY | | 2/3/22 | | CATEGORY | | FIBER OPTICS | | |
| ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13] | | CHECKED BY THOUGHTON | | 2/4/2022 | | PRODUCT DESCRIPTION | | | | |
| THIRD-ANGLE PROJECTION  | | APPROVED BY THOUGHTON | | 2/4/2022 | | FIBER OPTIC SENSOR CABLE, DIFFUSE REFLECTION, M3, STRAIGHT, R15 | | | | |
| CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | | COLOR VARIATIONS MAY OCCUR | | SIZE A | | CAGE CODE 43321 | | ITEM NO. FOACAMPDRC32 | | REV. A |
| SCALE: NONE | | CAD FILE: FOACAMPDRC32.SLDDRW | | SHEET 1 OF 1 | | | | | | |